

TENDER DOCUMENT

E-Tender Notice No: 02/2018-19/RGNUL

Dated: 29/ 05 /2018

Providing & fixing of Showcases in the waiting areas of Vice – Chancellor & Registrar offices, furniture items for setting up of work stations for various office branches in RGNUL campus, Sidhuwal, Patiala.

VOLUME -2



**(Construction and Maintenance Wing)
Rajiv Gandhi National University of Law,
Punjab, Patiala**

ARCHITECT/CONSULTANTS:

M/s Kothari Associates Pvt. Ltd.

G – 65, Connaught Circus, New Delhi 110001
011 23325040, 011 23324598, Fax: 011 23712001 11 23712001


Slams

****CONTENTS****
59-8259-82

SECTION - I
BILL OF QUANTITIES

SCHEDULE OF ITEMS OF WORK, QUANTITIES THEREOF AND RATE.
(THE CONTRACTOR / BIDDER IS TO QUOTE PERCENTAGE ABOVE OR BELOW
THE NIT AMOUNT)-----1 - 3

SECTION-II
FORM OF BID -----04--05

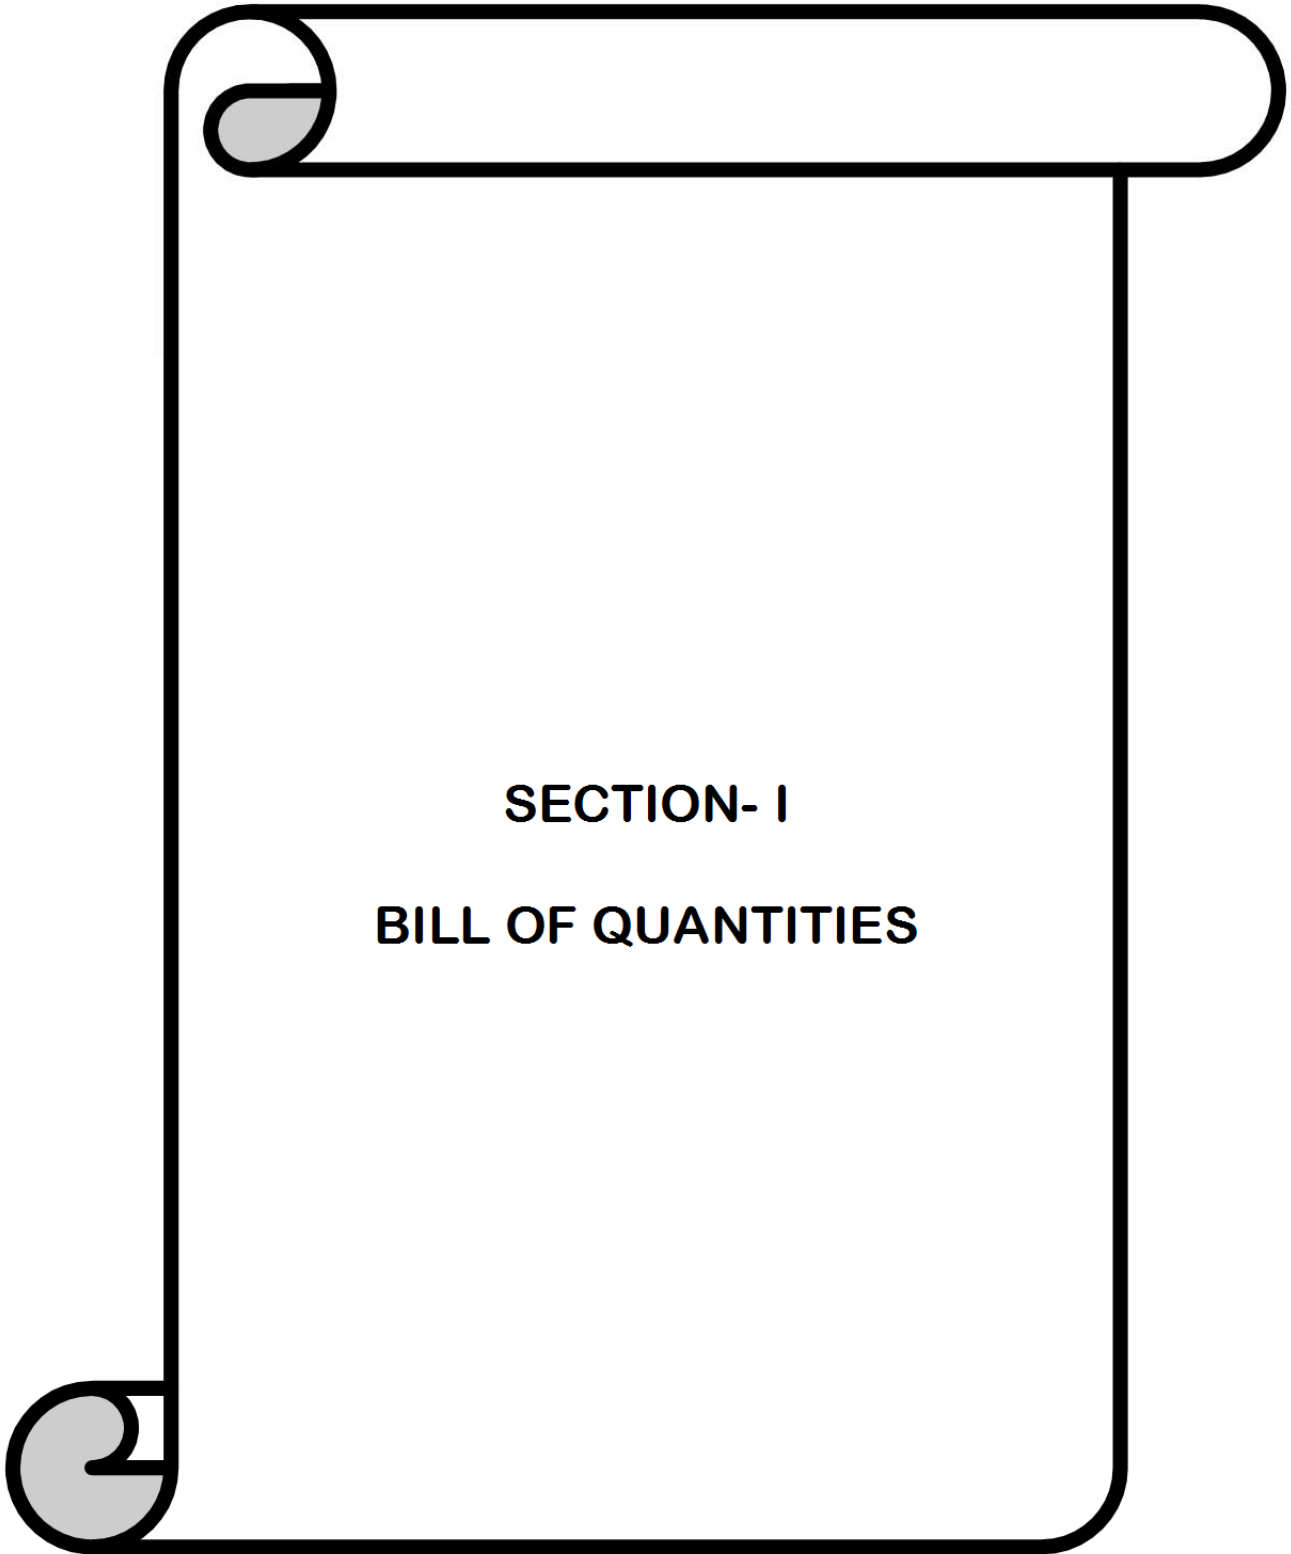

SECTION- I
BILL OF QUANTITIES

BILL OF QUANTITIES

Providing & fixing of Showcases in the waiting areas of Vice – Chancellor & Registrar offices, furniture items for setting up of work stations for various office branches in RGNUL campus, Sidhuwal, Patiala.

S. No	Description of items	Unit	Appx Quantities	Rate to be quoted by the bidder	Amount
1	Providing, making and fixing of showcases of desired size (As per site) 450 mm deep made out of 19 mm thick plywood both side teak finished. Back side of the showcase shall be of 12 mm one side teak finished. Shutters shall be of 8 mm toughened glass fitted with S.S hinges duly embedded through glass. 05 number Shelves in the showcases shall be of toughened glass 8 mm thickness to be supported on wooden Gola/ metal studs. Including all necessary patch fittings, SS Legs magnetic/ ball catchers, Lock & Stainless Steel handles in chrome/ brush finish. Complete in all respect duly mat finished melamine polish as per details shown in design and drawing.	100	Sqm		
2	Fabricating, supplying and fixing in position Work Stations as per design and drawing comprising of the following:				
a	1500 mm long 18mm thick BWP board construction for 600 mm deep and 750 mm high worktop including key board tray, sides, back, vertical and horizontal partitions/ supports with 1.0mm thick laminate on all exposed surfaces and 0.80 thick laminate of approved shade and colour(SF) on other inner side and providing wood lipping and fixing to low height partition as per drawing and design.				
b	Side unit of approximate size 900mm x 450mm x 750mm high made out of 18mm thick BWP commercial board construction having lamination of 1.0mm thick on one side and 0.80mm thick lamination on the other inner side of approved shade and colour (SF) with grain direction as per drawing or as directed on top, front, sides, back, shelves, verticals, shutters and wherever required with wood lipping and 100mm x 18mm				

R Sharma

	thick laminated BWP board skirting at bottom and necessary rough wood framework as per design and drawing at top and bottom and wherever required.				
c	Including all nails, glues, melamine polishing on all exposed faces, synthetic enamel paint on all unexposed faces of partition, wood preservative paint, fire retardant paint, sliding channel for drawers & keyboard, bracket for support fixed to partition, earl behari hinges, SS handles as approved, Godrej multipurpose locks, providing opening and cut-outs for switches, sockets, cable manager, etc. complete as per design and drawing.	4	EACH		
3	Fabricating, supplying and fixing in position Work Stations as per design and drawing comprising of the following:				
A	1800 mm long 18mm thick BWP board construction for 600 mm deep and 750mm high worktop including key board tray , sides, back, vertical and horizontal partitions/ supports with 1.0 mm thick laminate on all exposed surfaces and 0.80 thick laminate of approved shade and colour (SF) on other inner side and providing wood lipping and fixing to low height partition as per drawing and design.				
B	Side unit including drawer of approximate size 900mm x 450mm x 750mm high made out of 18mm thick BWP commercial board construction having lamination of 1.0 mm thick on one side and 0.80 mm thick lamination on the other inner side of approved make & shade and colour (SF) with grain direction as per drawing or as directed on top, front, sides, back, shelves, verticals, shutters and wherever required with wood lipping and 100mm x 18mm thick laminated BWP board skirting at bottom and necessary rough wood framework as per design and drawing at top and bottom and wherever required.				
c	Including all nails, glues, melamine polishing on all exposed faces, synthetic enamel paint on all unexposed faces of partition, wood preservative paint, fire retardant paint, sliding channel for drawers & keyboard, bracket for support fixed to partition, earl behari hinges, SS handles as approved, Godrej	21	EACH		


R Sharma

	multipurpose locks, providing opening and cut-outs for switches, sockets, cable manager, etc. complete as per design and drawing.				
4	Providing and fixing in position 50mm thick double skin low height partition made out of rough wood framework finished with 12mm thick BWP commercial ply 1.0mm thick laminate of approved shade and colour (SF) with grain direction on exposed surface as directed, matching horizontal & vertical grooves and 50 x 12 mm teak wood moulding on top and vertical as per design and drawing all complete including all necessary hardwares, fittings, melamine polish, nails, glues etc. to the complete satisfaction of Engineer-in-Charge/ Architect.	70	SQM		
	TOTAL				

NOTE:- All the quoted rates are inclusive of all the taxes including GST & freight etc.

SECTION- II

FORM OF BID

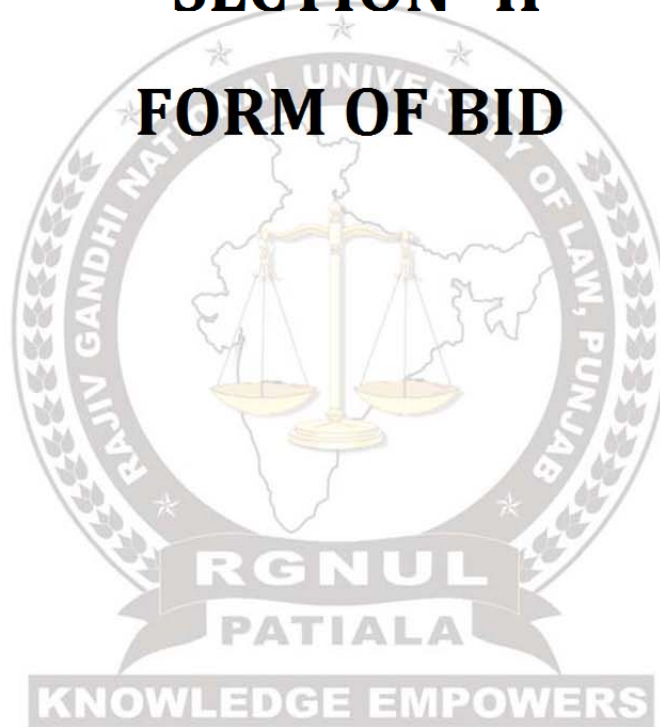

R. Sharma

FORM OF BID

Description of the Works

Providing & fixing of Showcases in the waiting areas of Vice – Chancellor & Registrar offices, furniture items for setting up of work stations for various office branches in RGNUL campus, Sidhuwal, Patiala.

To

**Registrar,
RGNUL, Patiala**

I/we have gone through the terms and conditions of this bidding document diligently.

My/our bid is as under:-

1. My/Our bid _____ the total tendered amount calculated above is **Rs**/-.
2. For payment purposes, item rates quoted against each item shall be applicable.
3. We undertake, if our Bid is accepted, to commence the Works as soon as is reasonably possible after the receipt of the Engineer's notice to commence and to complete the whole of the Works comprised, the Contract within the firm stated in the document.
4. We agree to abide by this Bid for the period of **120 days** from the date fixed for receiving the same and it shall remain binding upon us and may be accepted at any time before the expiration of that period.
5. Unless and until a formal Agreement is prepared and executed, this Bid together with your written acceptance thereof shall constitute a binding contract between us.

Rsham

6. We understand that you are not bound to accept the lowest or any tender, you may receive.

Unconditional Rebate if any:-

Dated this _____ day of _____ 2018


Signature _____ in the capacity
of _____ duly authorized to sign bids for and on
behalf of _____
(In Block capitals or typed)

Address

Witness

Address

Occupation

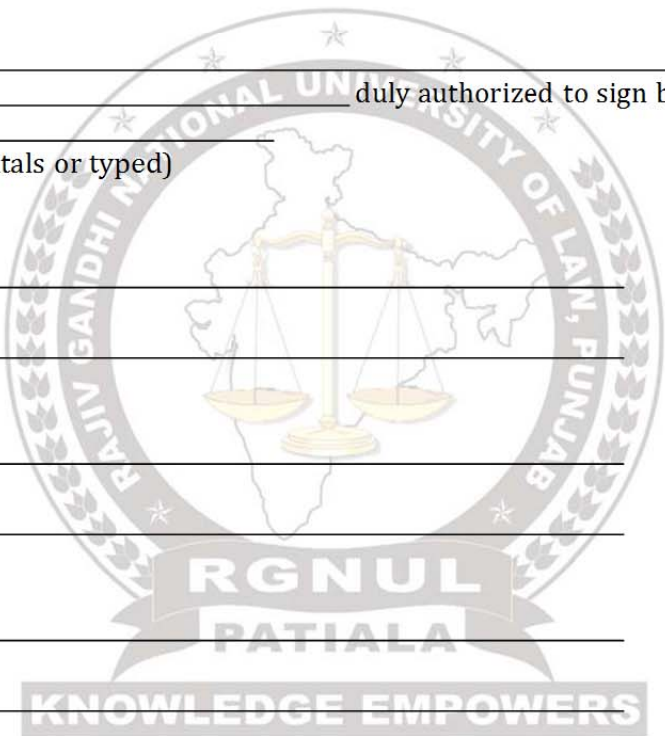

Registrar, RGNUL